CC 10000 TE SYSTEM
CONSISTS OF:

System parameters for 10000 btu when:
@ 38°F suction & 90°F ambient temperature with a 10° temperature differential of air flow over fan coil

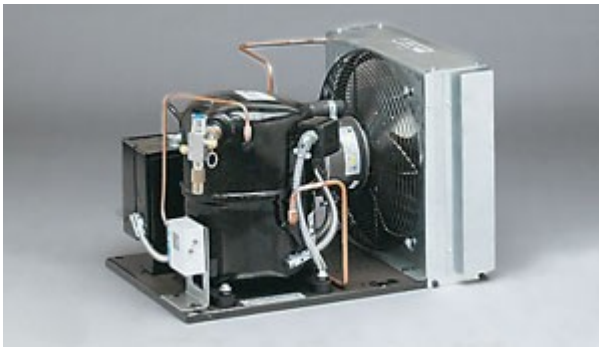

Condensing Unit:	
Part No.:	CU100
Horsepower:	1
Refrigerant:	R134a
Voltage:	208-230/1/60
MCA (Amps):	14.8
Length (In.):	24.0
Width (In.):	16.9
Height (In.):	15.9
Connection Suction (In.):	5/8 F
Connection Liquid (In.):	3/8 F
Connection Type:	Flare
Compressor:	CS10K6EPFV
Oil:	Polyol Ester
Receiver Cap. 90 % Full (Lbs.):	8.4
Shipping Weight (Lbs.):	130

US Cellar Systems / 3070 Golden Ave, Long Beach, CA 90806 / www.uscellarsystems.com
(562) 513-3017 phone and fax / info@uscellarsystems.com / tech line: (562) 728-5774

Evaporator:	
Part No.:	2/CC 46 FC
Voltage:	115v
MCA (Amps):	1.1a
Length (In.):	18″
Width (In.):	11.5″
Height (In.):	11.5″
Shipping Weight (Lbs.):	26 lbs. each
Connection Suction (In.):	3/8″
Connection Liquid (In.):	1/4″
Drain Line (In.):	1/2″
CFM:	400 each

System Line Set:

Between Coils:

Suction (In.):	3/8″
Liquid (In.):	1/2″

After "T"

Suction:	5/8″
Liquid:	3/8″